

ENGINE MOUNTING

INSULATOR, ENGINE MOUNT, LEFT

Removal

REMOVAL - LEFT MOUNT

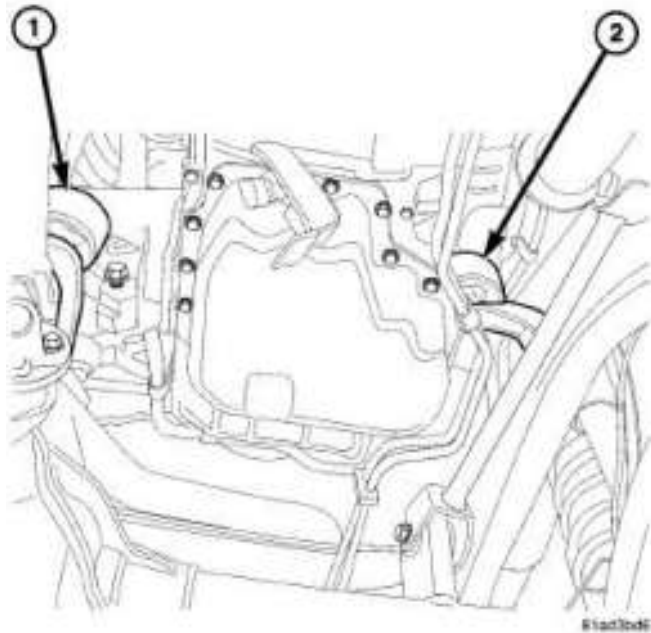


Fig. 212: ENGINE MOUNTS
Courtesy of CHRYSLER LLC

1. Disconnect the negative battery cable.
2. Remove the engine cover.
3. Raise and support vehicle.
4. Remove the belly pan skid plate.
5. Remove the right hand and left hand lower engine mount nuts.
6. Remove the viscous fan and position aside. Refer to Cooling/Engine/FAN, Cooling - Removal .
7. Install the Engine Support Fixture 6958 and raise the engine up.

NOTE: It is easier to remove the left engine mount from underneath vehicle.

8. Remove the upper nut and the engine mount.

Installation

INSTALLATION LEFT MOUNT

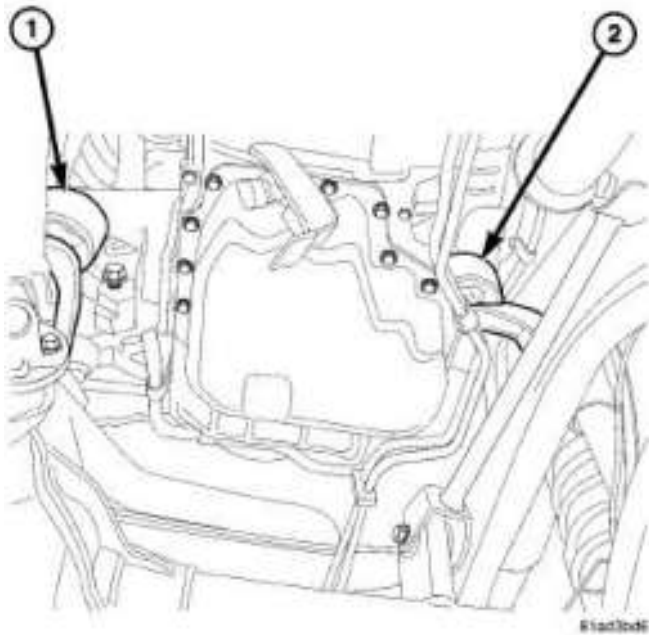


Fig. 213: ENGINE MOUNTS
Courtesy of CHRYSLER LLC

1. Position the left engine mount and hand tighten the retaining bolts.
2. Lower the engine and remove the Engine Support Fixture 6958.
3. Tighten the left upper engine mount nut to 54 N.m (40 ft. lbs.).
4. Tighten right hand and left hand engine mount nut to 54 N.m (40 ft. lbs.).
5. Install the belly pan skid plate.
6. Lower the vehicle.
7. Install the engine cover.
8. Connect the negative battery cable.

INSULATOR, ENGINE MOUNT, RIGHT

Removal

REMOVAL - RIGHT MOUNT

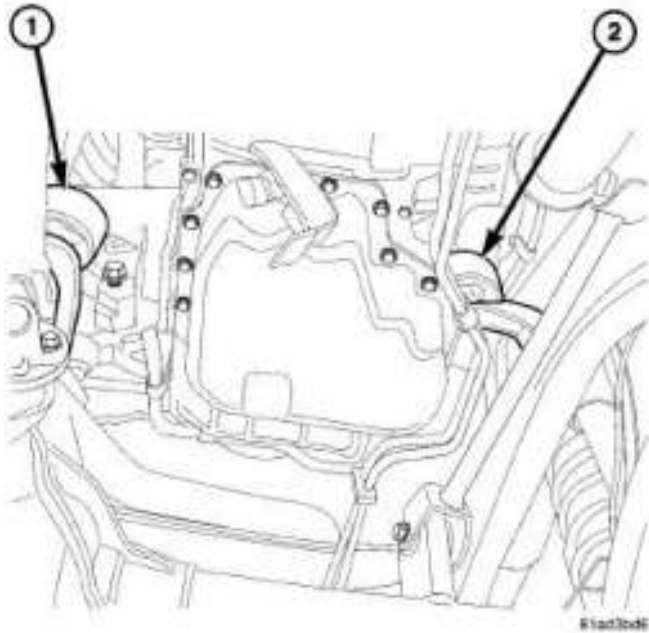


Fig. 214: ENGINE MOUNTS
Courtesy of CHRYSLER LLC

1. Disconnect the negative battery cable.
2. Remove the engine cover.
3. Raise and support the vehicle.
4. Remove the belly pan skid plate.
5. Remove the right hand and left hand lower engine mount nuts.
6. Remove the viscous fan and position aside. Refer to Cooling/Engine/FAN, Cooling - Removal .
7. Install the Engine Support Fixture 6958 and raise the engine up.

NOTE: It is easier to remove the right engine mount from up top.

8. Remove the nut and the engine mount.

Installation

INSTALLATION - RIGHT MOUNT

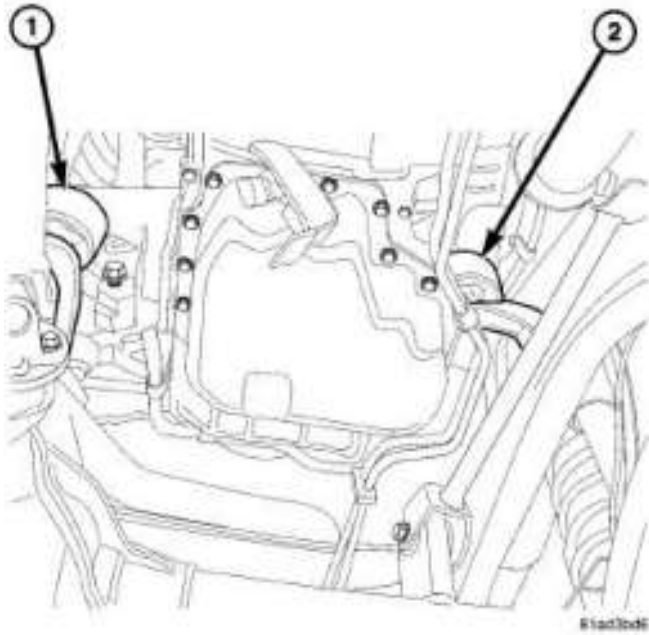


Fig. 215: ENGINE MOUNTS
Courtesy of CHRYSLER LLC

1. Position the right engine mount and hand tighten the retaining bolts.
2. Lower the engine and remove the Engine Support Fixture 6958.
3. Tighten the right upper engine mount nut to 54 N.m (40 ft. lbs.).
4. Tighten right hand and left hand engine mount nut to 54 N.m (40 ft. lbs.).
5. Install the belly pan skid plate.
6. Lower the vehicle.
7. Install the engine cover.
8. Connect the negative battery cable.